

Structure-Activity Relationships of Propylene Glycol, Glycerin, and Select Analogs for Carbonyl Thermal Degradation Products

Melvin, M.S.; Ballentine, R.M.; Gardner, W.P.; McKinney, W.J.; Smith, D.C.; Pithawalla, Y.B.; Wagner, K.A.





Altria

Altria Client Services

Thermal Degradation of eLiquids



Propylene Glycol
Glycerin
Nicotine
Flavor Systems

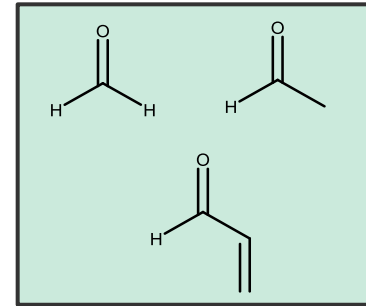


- Propylene glycol (PG) and Glycerine (GLY) can thermally degrade upon heating
 - Formaldehyde, Acetaldehyde, Acrolein^{1,2,3}



Carbonyls in E-Cigarettes

- Geiss et al. and Gillman et al. demonstrated that carbonyl formation increased with temperature^{1,4}
- US FDA PMTA Draft Guidance for ENDS Products recommends reporting four carbonyls in e-liquid and aerosol⁵

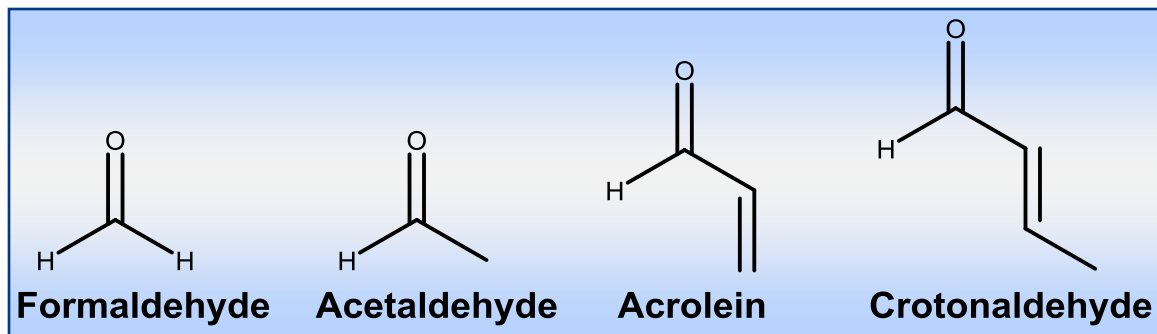

Objectives and Approach

- Determine the formation pathways of formaldehyde, acetaldehyde, acrolein, and crotonaldehyde:
 1. Identify source of degradation products using $^{13}\text{C}_3$ -labeled PG and GLY
 2. Determine the role of 3-hydroxypropanal (3-HPA) as an intermediate during the thermal degradation of e-liquids
 3. Propose rational mechanisms based on results
 4. Determine key reaction centers using rationally selected derivatives of PG and GLY



Microwave Model System


- Model microwave system used to generate target carbonyls
 - Previously used to identify diacetyl and acetyl propionyl formation pathways⁶
- Microwave system evaluated for equivalent yields to e-cigarette
 - Sample = 50% PG : 50% GLY + 2.5 % nicotine (w/w)
 - 140 puffs
 - 55 mL puff volume, 5 sec puff duration, 30 sec puff period, square wave

CEM Discovery SP Hybrid



Analyte Yield Comparison

140 puffs using 55 ml Puff Volume, 5 sec Puff Duration, 30 sec Puff Period; Square Wave

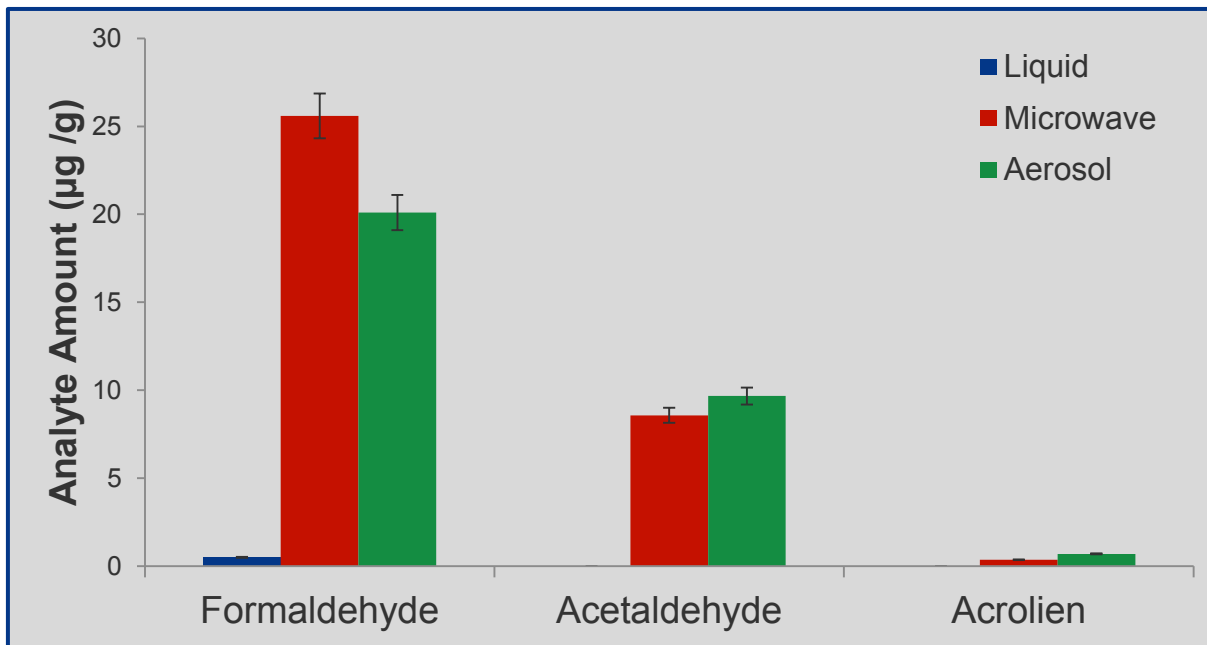

Crotonaldehyde was not detected




Identify Source of Degradation Products Using ^{13}C -labeled PG and GLY



Carbon-13 Labeled PG and GLY



- Samples:
 - 50% $^{13}\text{C}_3$ -PG : 50% GLY + 2.5% nicotine (w/w)
 - 50% PG : 50% $^{13}\text{C}_3$ -GLY + 2.5% nicotine (w/w)

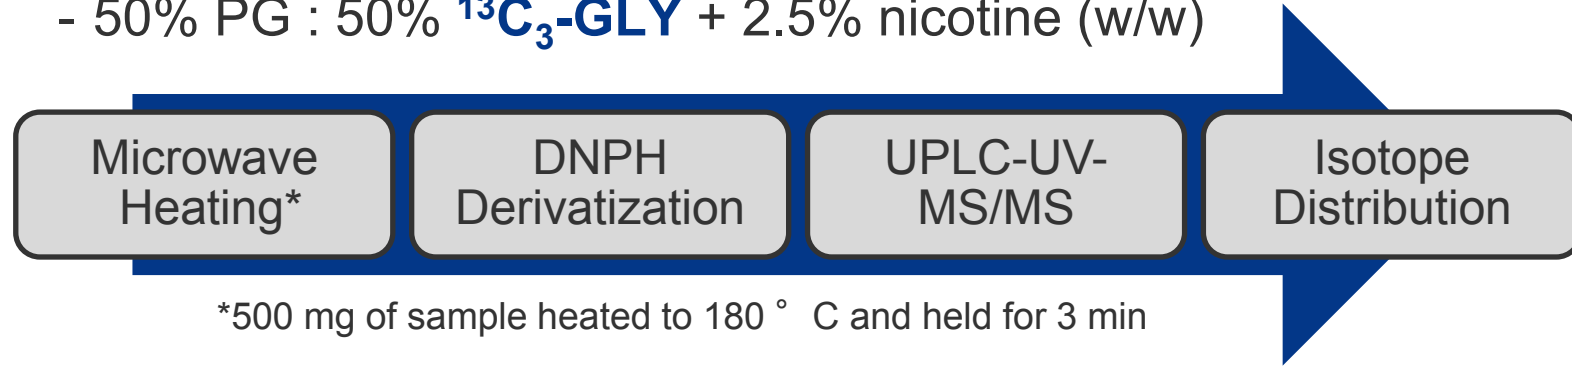

- Labeled products directly traceable to labeled precursor

Product Distribution Using $^{13}\text{C}_3$ -PG

50% $^{13}\text{C}_3$ -PG : 50% GLY + 2.5 % Nicotine (w/w)

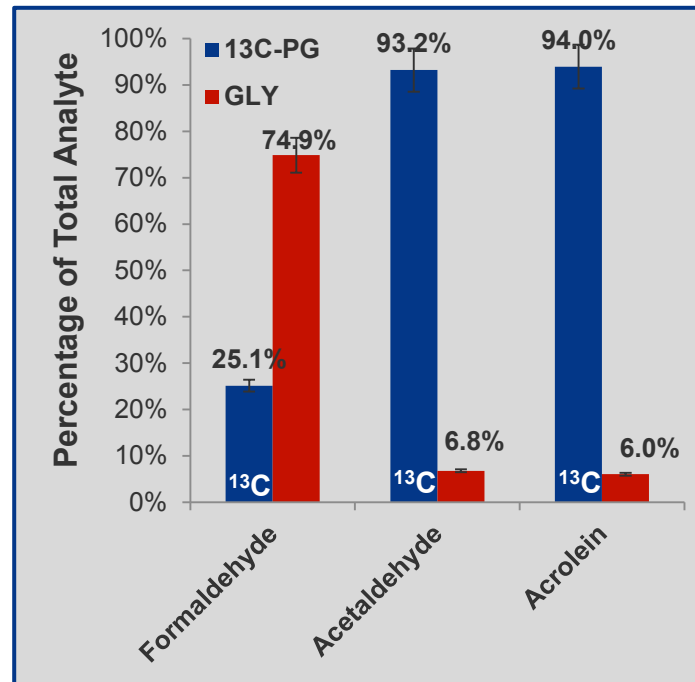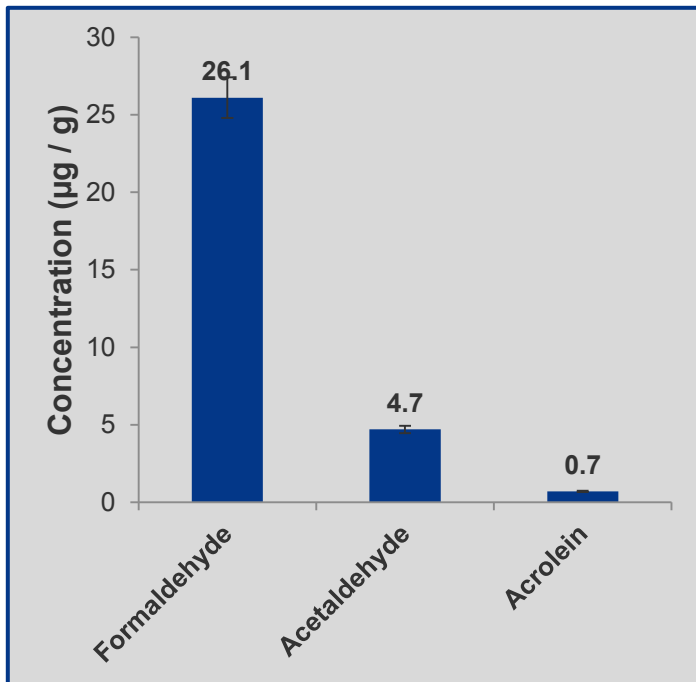


Crotonaldehyde was not detected



Product Distribution using $^{13}\text{C}_3$ -GLY

50% PG : 50% $^{13}\text{C}_3$ -GLY + 2.5 % Nicotine (w/w)

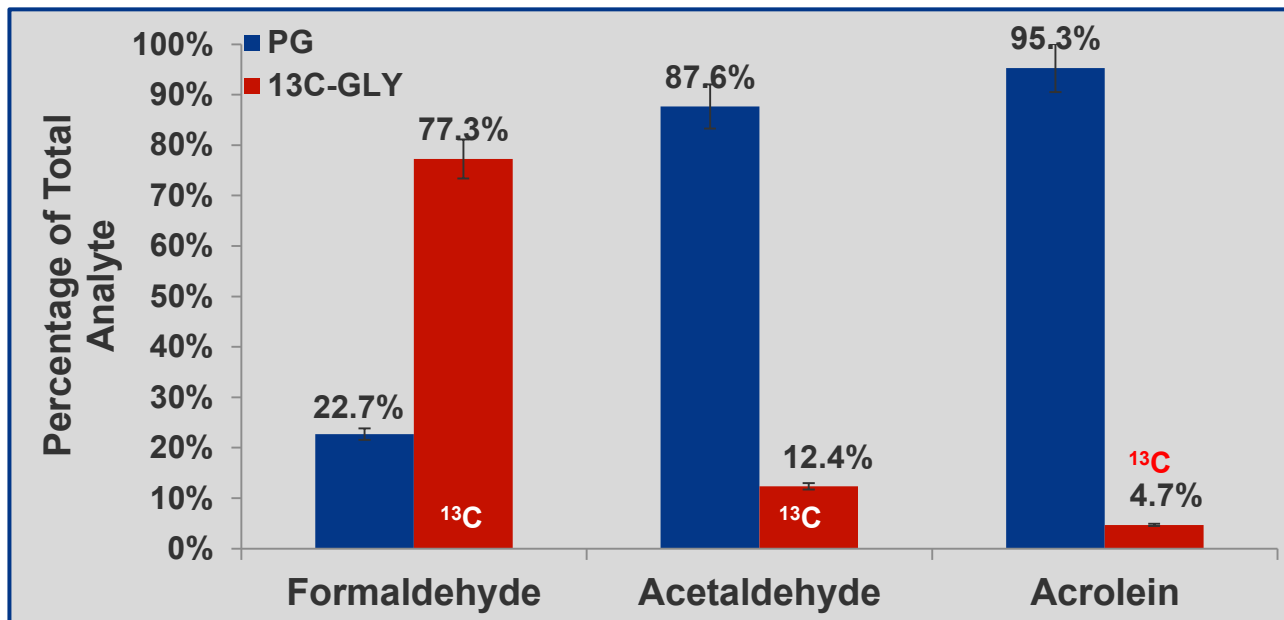

Crotonaldehyde was not detected



Summary: ^{13}C -Labeling Studies

- Formaldehyde was predominantly formed from GLY
- Acetaldehyde and acrolein were predominantly formed from PG
- Crotonaldehyde was not detected





Determine the Role of 3-hydroxypropanal (3-HPA) as an Intermediate During the Thermal Degradation of e-Liquids




3-Hydroxypropanal Background

- Researchers proposed formaldehyde and acetaldehyde are produced from the retro-aldol condensation of 3-hydroxypropanal (3-HPA)^{4,7}

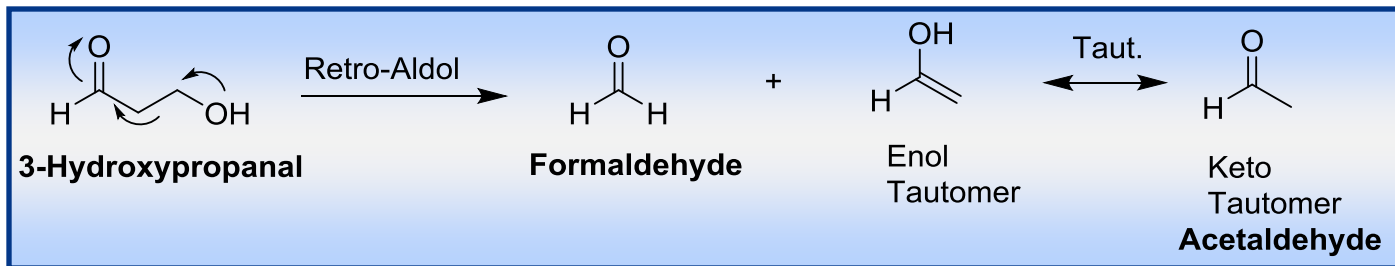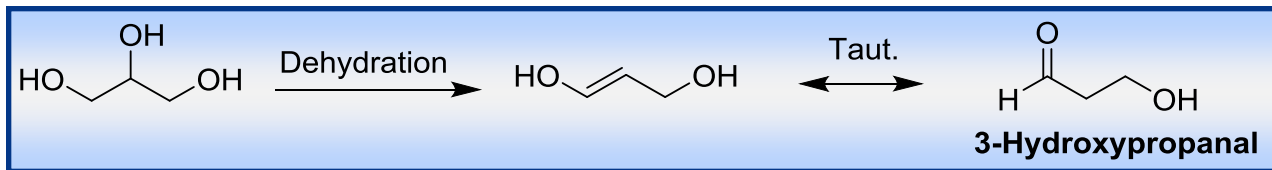

3-HPA Fortification Studies



500 mg e-liquid 50% PG : 50% GLY + 2.5 % nicotine (w/w)

Fortify samples with 3-HPA at 3 levels (300, 700, 1500 µg)


Microwave Heating: 180 °C for 3 min

DNPH Derivatization

UPLC-UV-MS/MS Analysis

Results: 3-HPA Fortification (N=3)

50% PG : 50% GLY + 2.5 % Nicotine (w/w)

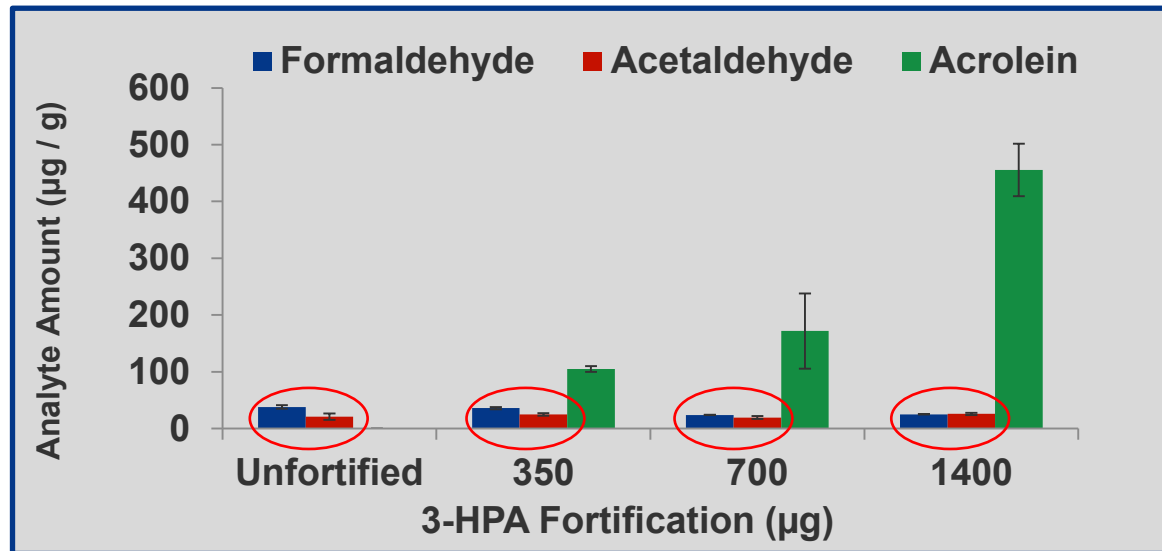

Acrolein Yield ~ 30%

Summary: 3-Hydroxypropanal (3-HPA)


- Unfortified e-liquids
 - 3-HPA, acrolein, and crotonaldehyde were not detected
- E-liquids fortified with 3-HPA
 - Crotonaldehyde was not detected
 - No increase in formaldehyde and acetaldehyde
 - 3-HPA converted to acrolein with ~30 % yield
- The retro-aldol condensation of 3-HPA appears to be a negligible pathway for the production of formaldehyde and acetaldehyde under test conditions




Suggested Formation Pathways in Aerosol

3-HPA was not detected


Formaldehyde from Glycerin

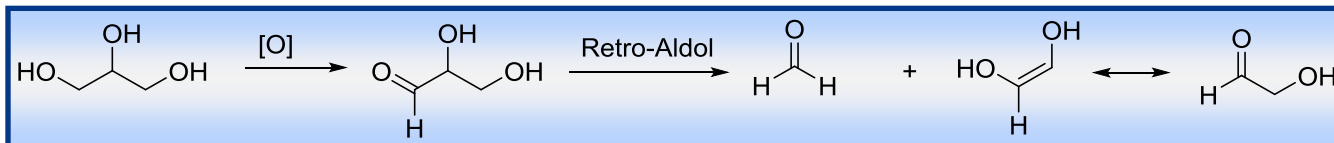

Acetaldehyde from Propylene Glycol

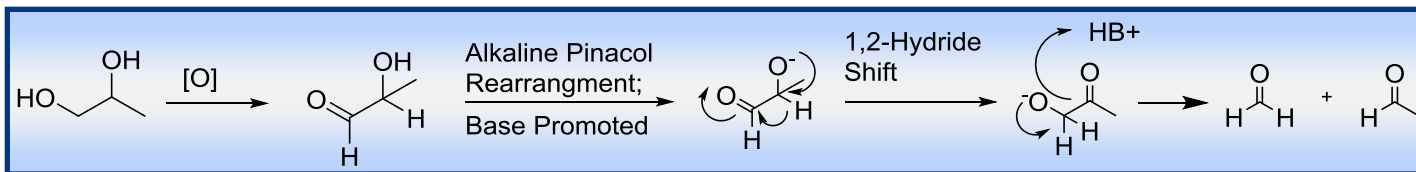

Acetaldehyde from Propylene Glycol



Determine Key Reaction Centers Using Rationally Selected Derivatives of PG and GLY




Experimental: Evaluation of Derivatives

- Derivatives:
 - Methoxy derivatives selected to reduce autoxidation efficiency
 - Methyl derivatives selected to reduce dehydration efficiency
- Samples:
 - 50% PG : 50% **GLY-Deriv** + 2.5 % nicotine (w/w) -> Formaldehyde
 - 50% **PG-Deriv** : 50% GLY + 2.5 % nicotine (w/w) -> Acetaldehyde and Acrolein
- Control = 50% PG : 50% GLY + 2.5% nicotine (w/w)



GLY Derivatives: Formaldehyde

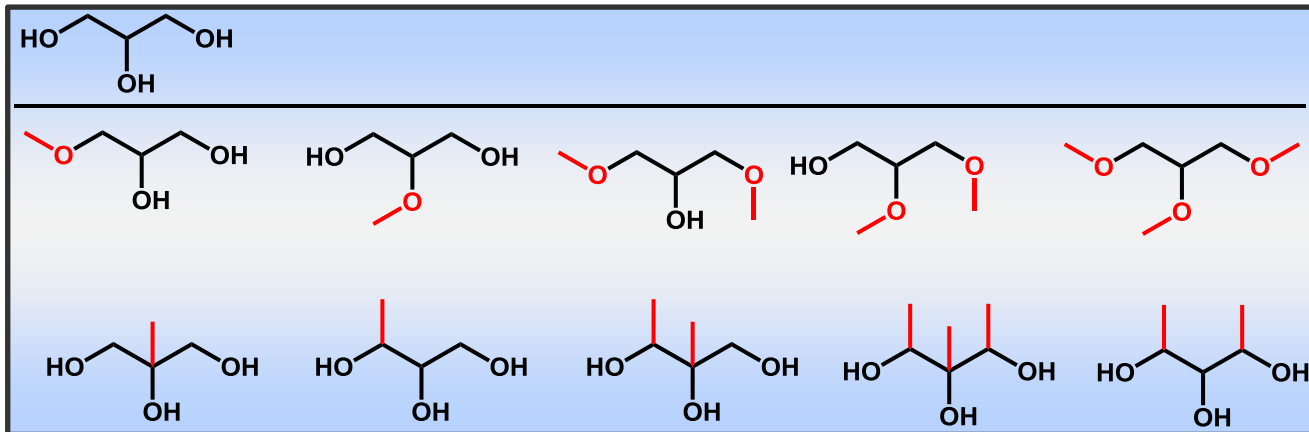


Methoxy Derivatives

Methyl Derivatives




Formaldehyde: GLY Derivatives

Results support proposed mechanism


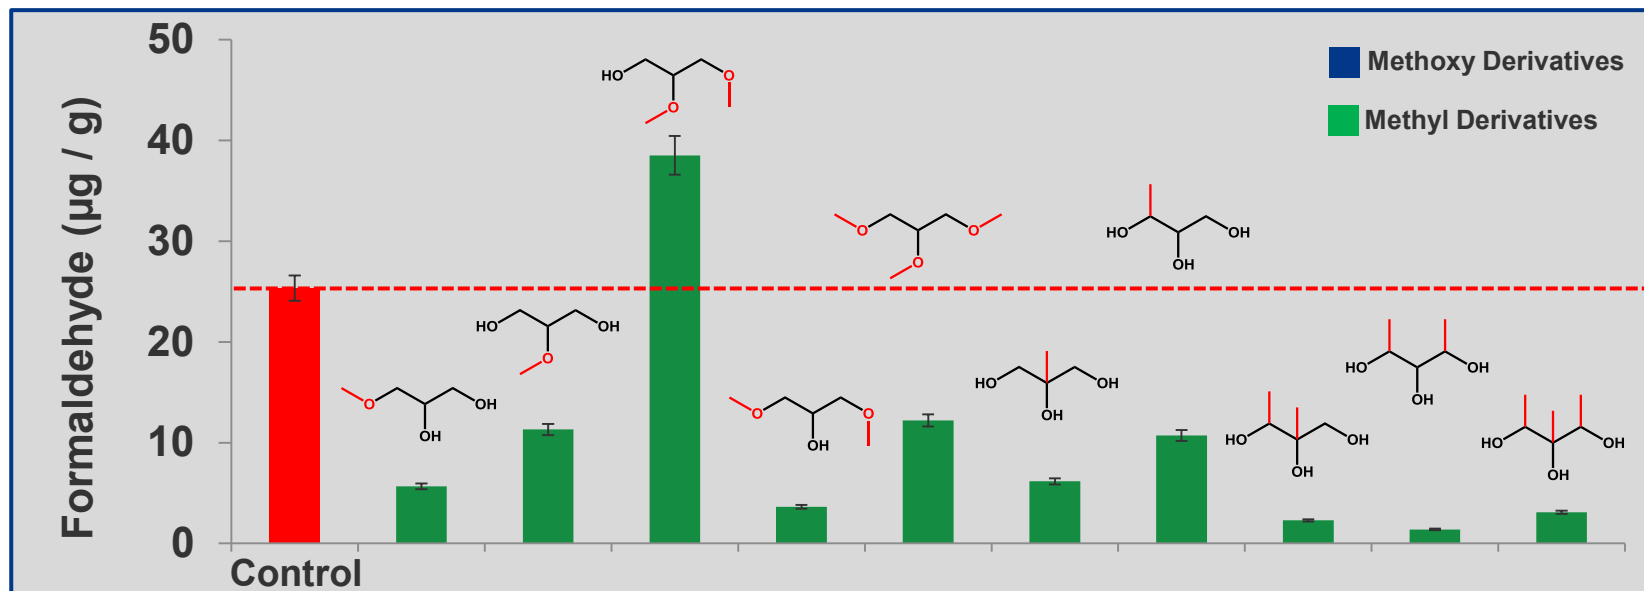


PG Derivatives: Acetaldehyde and Acrolein

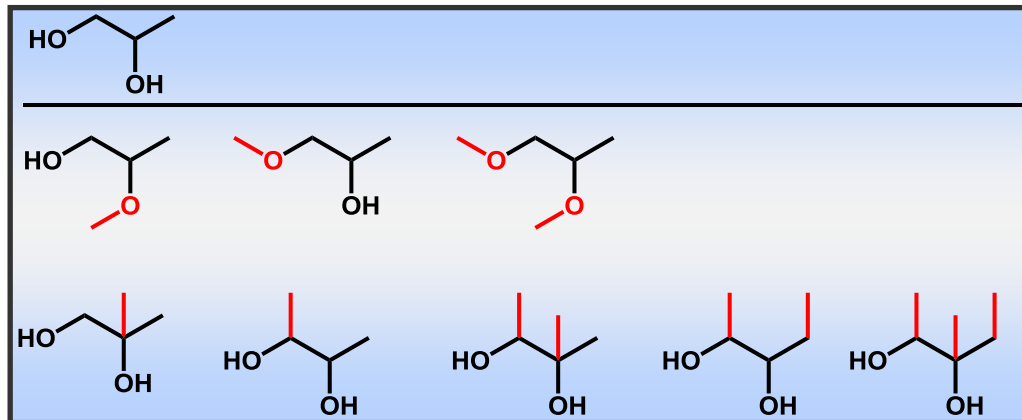



Acetaldehyde: PG Derivatives

Results do not support proposed mechanism

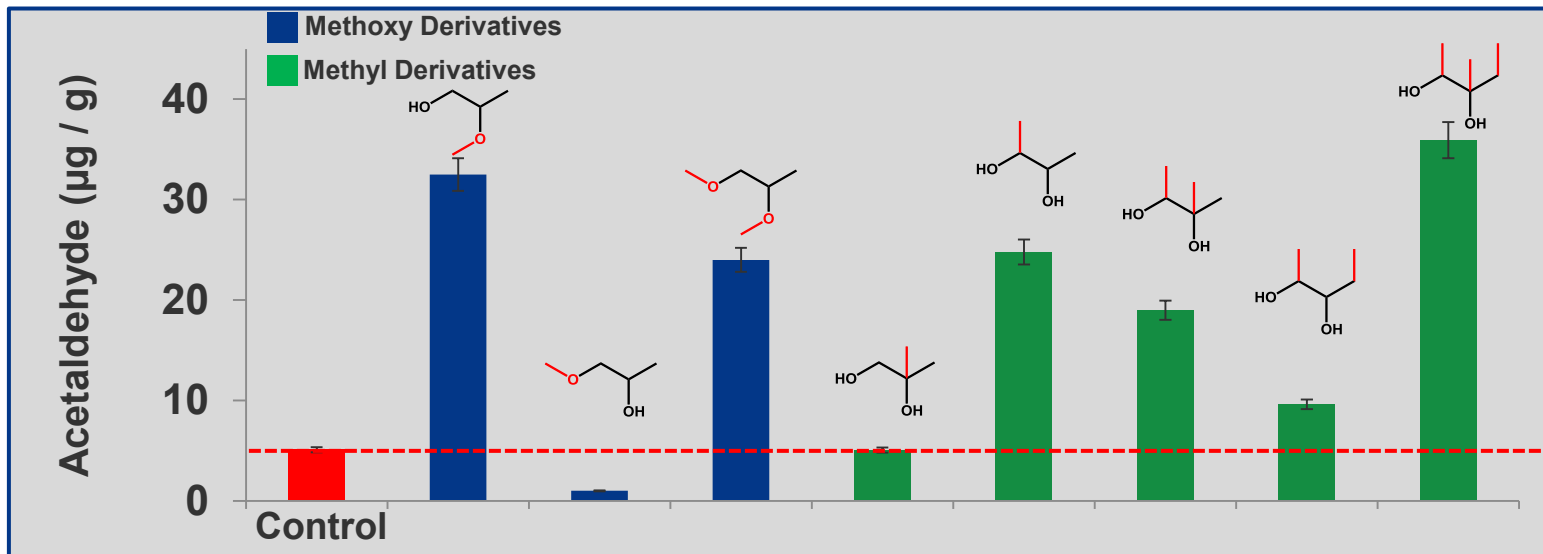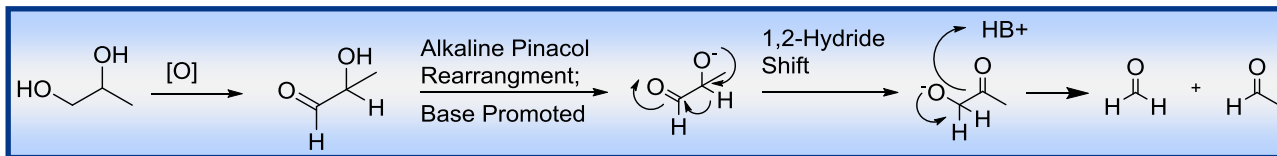

Acrolein: PG Derivatives

Results support proposed mechanism

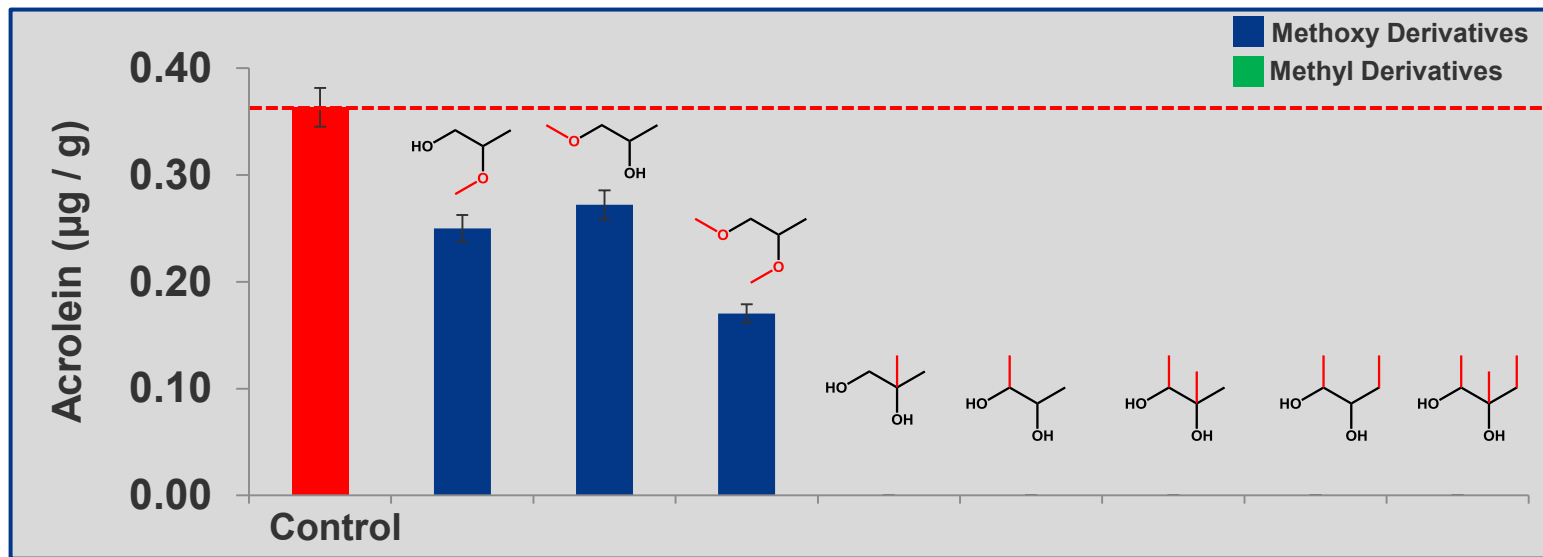

Summary: Methoxy and Methyl Derivatives

- Formaldehyde: GLY Derivatives
 - Substitution reduced formaldehyde generation
 - Consistent with proposed pathway
- Acetaldehyde: PG Derivatives
 - Substitution increased acetaldehyde production
 - Not consistent with proposed pathway
 - Under further investigation
- Acrolein: PG Derivatives
 - Substitution decreased acrolein generation
 - Consistent with proposed mechanism
- Crotonaldehyde was not detected



Conclusions

- Formaldehyde derived primarily from glycerin
- Acetaldehyde and acrolein derived primarily from propylene glycol
- 3-hydroxypropanal pathway has negligible contribution to formaldehyde and acetaldehyde generation
- Proposed pathways for formaldehyde and acrolein are consistent with experimental results
- Acetaldehyde pathway under further investigation

References:

1. Geiss, O., Bianchi, I., and Barrero-Moreno, J. (2016) Correlation of volatile carbonyl yields emitted by e-cigarettes with the temperature of the heating coil and the perceived sensorial quality of the generated vapours. *Int J Hyg Environ Health* 219, 268-277.
2. Farsalinos, K. E., and Gillman, G. (2017) *Carbonyl Emissions in E-cigarette Aerosol: A Systematic Review and Methodological Considerations*. *Front Physiol* 8, 1119.
3. Kosmider, L., Sobczak, A., Fik, M., Knysak, J., Zaciera, M., Kurek, J., and Goniewicz, M. L. (2014) Carbonyl compounds in electronic cigarette vapors: effects of nicotine solvent and battery output voltage. *Nicotine Tob Res* 16, 1319-1326.
4. Gillman, I. G., Kistler, K. A., Stewart, E. W., and Paolantonio, A. R. (2016) Effect of variable power levels on the yield of total aerosol mass and formation of aldehydes in e-cigarette aerosols. *Regul Toxicol Pharmacol* 75, 58-65.
5. FDA. (2016). *Guidance for industry. Premarket Tobacco Product Applications for Electronic Nicotine Delivery Systems. Draft Guidance*. Available at: <https://www.fda.gov/downloads/TobaccoProducts/Labeling/RulesRegulationsGuidance/UCM499352.pdf>. Accessed 15Feb2018.
6. Melvin, M.S.; Avery, K.C.; Ballentine, R.M.; Gardner, W.P.; McKinney, W.J.; Smith, D.C.; Wagner, K.A. *Thermal Degradation Studies of Electronic Cigarette Liquids Part 2: Development of a Model Reaction System Used to Study α -Dicarbonyl Formation*. Presented at the 71st Tobacco Science research Conference, 2017, Bonita Spring, Fl.
7. Flora, J. W., Meruva, N., Huang, C. B., Wilkinson, C. T., Ballentine, R., Smith, D. C., Werley, M. S., and McKinney, W. J. (2016) Characterization of potential impurities and degradation products in electronic cigarette formulations and aerosols. *Regul Toxicol Pharmacol* 74, 1-11.



- **Further data and details:**

www.altria.com/ALCS-Science

